

# Model 1516 SentiVoice

SPEC SHEET

Zetron's SentiVoice monitors alarm inputs and, upon sensing an alarm condition, automatically transmits voice messages or pages over radio or a public address system. Users can respond to the alarm or page via radio by remotely controlling SentiVoice outputs connected to pumps, generators, lights etc. Eighty seconds of solid state, battery-backed memory provide natural voice storage. The efficient SentiVoice can broadcast Two-Tone, Alphanumeric (POCSAG), 5/6 Tone, DTMF, or alert tones.

## Applications

Economical wireless alarm monitoring for remote sites, machine monitoring, process control, manufacturing, and security. Give fewer personnel more capability with automatic voice alerting and remote control via radio. Machines and industrial processes can alert or page service or security personnel automatically.

### MEDIA DOCK INTERFACES SUPPORT

- Economical, automatic, on-site paging
- Notify maintenance or emergency personnel with specific voice messages
- Automatic voice annunciator for PA systems
- Water/Wastewater system monitoring and control
- Irrigation monitoring & control
- Agricultural monitoring & control
- Water tanks and lift stations monitoring & control
- Monitor and report security at remote RF sites
- Send specific text pages to alphanumeric pagers

## Features

### Voice Message Alerting

- **Radio:** Notify maintenance or emergency personnel with recorded voice messages over your current radio system. Eight alarm inputs or zones. Record up to 80 seconds of natural voice in solid state memory. Easy to program via phone or RS-232
- **Pager:** Alert specific personnel via 3 pager codes per alarm zone. Notify with specific voice instructions. Use most types of pagers.
- **Public Address (PA):** Push button voice announcements in any language. Announcements in airports, exhibit halls, parking garages.

### Text Message Alerting

- **POCSAG (digital) pager:** Send a different message of 35 text characters to 3 different alphanumeric pagers for each of the 8 alarm zones

### DTMF Alerting

- **Radio:** Send a different 15 digit DTMF sequence for each alarm zone.



### REMOTE CONTROL OPERATION

- **Radio:** Remote control equipment via DTMF over radio at the SentiVoice site with up to 2 control relays. Control pumps, lights, gates, generators etc. Confirm closed loop control via voice confirmation.

### OPERATIONS AND PROGRAMMING


- **Radio:** Remote control equipment via DTMF over radio at the SentiVoice site with up to 2 control relays. Control pumps, lights, gates, generators etc. Confirm closed loop control via voice confirmation.

### SUPPORTED FEATURES

- Each of the 8 alarm zones can be programmed for a different text message
- Up to 2 voice messages per zone
- Precede messages with Two-Tone paging tones, DTMF, or siren alert ones
- Messages recorded via phone handset and can be changed remotely via radio
- Send 35 characters of text to 3 different alphanumeric pagers per alarm zone
- Radio connections are audio in, audio out, push to talk, and COR
- Multiple 1516's can share same radio
- Program time between alerts to 99 minutes
- Send messages up to 14 times in each alarm cycle

ZETRON

## APPLICATION EXAMPLES

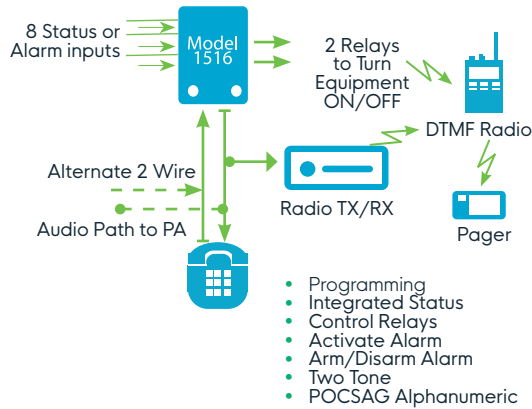

- Send "ALL'S WELL" up to 8 times a day
- Set alarm inputs for normally open, normally closed, momentary, and status
- Set alarm input debounce time for noisy signals
- Program unit ID and security code
- Program conventional or trunking radio interface
- Divide voice storage into any length message
- Program up to 3 pager codes for each of the 8 zones

## OPTIONS

- Paging Format, Two Tone, Motorola & GE
- Paging Format, Two-Tone, Motorola & Plectron
- Paging Format, POCSAG (512 or 1200 baud)
- Paging Format, 5/6 Tone
- Voice Option - 10 second increments
- Extended Voice Option - 40 second increments
- Model 1517 SentiVoice+ includes NEMA 4X enclosure, battery, charger/supply
- Remote Control Relay (limit 2)

## SUPPORTED FEATURES

- Dual network connections
- Dual power connections
- Hot standby capability for Z-Node Manager, Telephony Gateway, Portal services and Location Gateway service.
- Long term IP voice loggers supported: Eventide, Exacom, Stancil, CVDS, REVCORD, Higher Ground, NICE, Verint, DSS Corporation.

## Specifications

### PHYSICAL

#### Power

13.8VDC nominal, 10.5-16VDC Weight

#### Current

Max standby with relays open  
- 115mA at 16VDC  
Max standby with relays closed  
- 300mA at 16VDC

Temperature:

0 to +60 degrees C

Size:

7.25"W x 10.5"D x 2.25"H

Case:

painted aluminum, wall mountable

Weight:

2 lbs

Voice Storage:

10, 20, 40, or 80 seconds

Voice Messages:

16 max

### RADIO INTERFACE

Audio Output:

20mV to 2V P-P, 600 ohm

Audio Input:

3V P-P, >30K ohm minimum

Channel Busy Input (COR):

1 to 4.5 V adjustable

PTT (Push to Talk) Output:

Relay to gnd, 300mA max, normally open or closed

### RS-232 INTERFACE

Baud Rate:

4800

Parity:

None

Bits:

8

Stop Bits:

1

### I/O SPECIFICATIONS EXTERNAL INPUTS

8 Contact Closure Inputs:

Lo < 0.8 volts

Hi > 2.0 volts

Protected to +/- 48VDC

### EXTERNAL OUTPUTS

Relays (limit 2):

SPDT relay, 120VAC or 28VDC, 60VA max

### ZETRON AMERICAS

PO Box 97004,  
Redmond, WA USA  
98073-9704  
P: +1 425 820 6363  
F: +1 425 820 7031  
E: zetron@zetron.com

### ZETRON EMEA

27-29 Campbell Court, Bramley,  
Hampshire RG26 5EG, United  
Kingdom  
P: +44 1256 880663  
F: +44 1256 880491  
E: uk@zetron.com

### ZETRON AUSTRALASIA

PO Box 3045, Stafford Mail Centre,  
Stafford QLD 4053, Australia  
P: +61 7 3856 4888  
F: +61 7 3356 6877  
E: au@zetron.com

# ZETRON

Always on, always ready